




# N Test Tool

The N type test tool is primarily used to pressure test production tubing strings. Typically used for pressure testing tubing integrity during or after completions operations. The N type test plug can be dropped and pumped into place, or be ran with slickline. The N type test tool can either be used with a metal to metal seal on the no-go ring,

## Applications:

Pressure testing production tubing if a hole or communication is suspected.  
Checking tubing integrity before bottom holes pumps are installed or activated.  
used to retain fluid or chemical in the tubing string during maintenance of the wellbore.

| Size             | 1.50"   | 2.00"   | 2.50"   | 3.00"   |
|------------------|---------|---------|---------|---------|
| Fishneck OD (")  | 1.188"  | 1.375"  | 1.375"  | 1.75    |
| Fishneck OD (mm) | 30.17mm | 34.93mm | 34.93mm | 44.45mm |
| Maximum OD (")   | 1.656"  | 1.906"  | 2.343"  | 2.867"  |
| Maximum OD (mm)  | 42.06mm | 48.41mm | 59.51mm | 72.82mm |

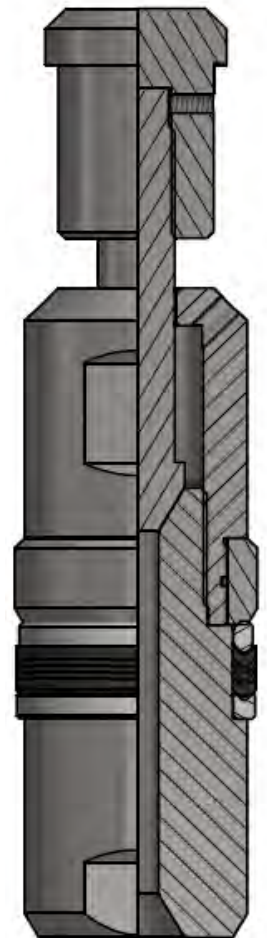

\*Smaller or larger sizes available upon request  
Contact your Brio-Tech representative for more information

