

No-Go Dart - Fluted


Fluted no-go darts are typically landed in a profile nipple of corresponding size, either on the seal bore in the case of a selective nipple, or on the no-go of a non selective nipple, these typically serve as a platform for sub-surface tools or instruments to be landed on.

Applications:

Can be used as a platform for sub-surface tools.

Can be used as a method to prevent tools or equipment from travelling past a particular point in the wellbore.

Size	2 3/8"	2 7/8"	3 1/2"
Upper Thread Conn.	0.938-10 UN	0.938-10 UN	0.938-10 UN
Lower Thread Conn.	0.938-10 UN	0.938-10 UN	0.938-10 UN
Maximum OD (")	1.906"	2.347"	2.867"
Maximum OD (mm)	48.41mm	59.61mm	72.82mm
Fishneck OD (")	1.375"	1.375"	1.375"
Fishneck OD (mm)	24.93mm	34.93mm	34.93mm

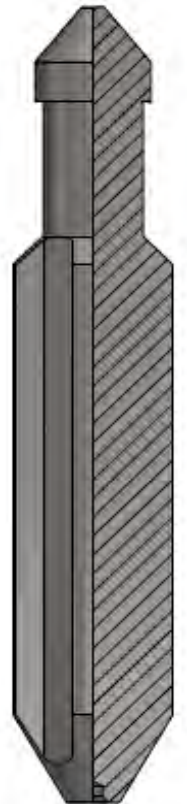

*Smaller or larger sizes available upon request, as well as custom materials, and a wide range of thread specs.
Contact your Brio-Tech representative for more information

BRIO-TECH PRESSURE CONTROLS - 3904 – 53RD AVENUE NW, EDMONTON, ALBERTA, CANADA T6B 3N7
(780) 670-2020

PLEASE STATE PART DESCRIPTION AND SIZE WHEN ORDERING

