



Releasable Overshot

The releasable overshot is used to engage the outside diameter downhole equipment that has become damaged or unretrievable by conventional means.

In addition, each size of overshot comes with a range of slips or grapples.

The releasable overshot has a built-in shear mechanism that allows for the release of the slips or grapple and thus eliminating the need for baiting of downhole equipment.


Applications:

The releasable overshot can be used in virtually all applications that a conventional non-releasable positive overshot can be used.

The releasable overshot can be utilized to retrieve lost or damaged wireline equipment, completion accessories, artificial lift equipment, or virtually any other debris that is able to be engaged on the outside diameter by the slips of the releasable overshot.

BRIO-TECH PRESSURE CONTROLS

Size	2.00"	2.50"	3.00"	3.50"	4.00"
Upper Thread	0.938-10UN	0.938-10UN	1.062-10UN	1.062-10UN	1.062-10UN
Max OD (")	1.90"	2.30"	2.80"	3.25"	3.80"
Max OD (mm)	48.25mm	58.42mm	71.12	82.55	96.52
Fishneck (")	1.375	1.75"	1.75"	2.31"	2.31"
Fishneck (mm)	34.93mm	44.5mm	44.5mm	58.67mm	58.67mm
Min Grapple OD (")	0.50"	0.50"	0.50"	0.50"	0.50"
Max Grapple OD (mm)	12.70mm	12.70mm	12.70mm	12.70mm	12.70mm
Max Grapple OD (")	1.50"	1.75"	2.00"	2.31"	2.750"
Max Grapple OD (mm)	38.10mm	44.45mm	50.80mm	58.67mm	69.85mm

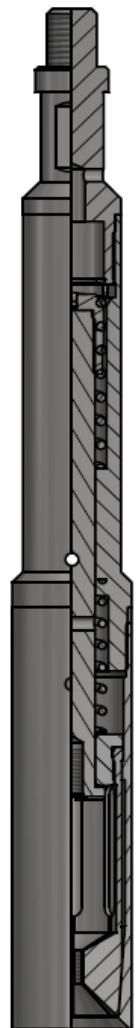

Contact your Brio-Tech representative for more information regarding this equipment.

BRIO-TECH PRESSURE CONTROLS - 3904 – 53RD AVENUE NW, EDMONTON, ALBERTA, CANADA T6B 3N7
(780) 670-2020

PLEASE STATE PART DESCRIPTION AND SIZE WHEN ORDERING

